

Manual Carousels

The Carousel rotates materials 360° with the assistance of an operator. Now loading and unloading operations can be done more efficiently; minimizes fatigue and risk of back injury. The carousel may be added to an existing work bench, scissor table, or simply placed on the floor. Constructed from two pieces of rolled structural angle (3/16" thick). A series of roller bearings transfer the load smoothly and evenly to the supporting surface. Four guide rollers keep the rings aligned.

MODEL NUMBER	OUTER DIAMETER	CAPACITY (POUNDS)	OVERALL HEIGHT	STARTING VS. MAINTAINING FORCE	SHIPS VIA	NET WT. (POUNDS)
CA-18-2	18"	2,000	2"	35 lbs. / 20 lbs.	UPS	20
CA-24-2	24"	2,000	2"	35 lbs. / 20 lbs.	UPS	26
CA-24-4	24"	4,000	2"	45 lbs. / 25 lbs.	UPS	30
CA-30-2	30"	2,000	2"	35 lbs. / 20 lbs.	UPS	36
CA-30-4	30"	4,000	2"	45 lbs. / 25 lbs.	UPS	40
CA-36-2	36"	2,000	2"	35 lbs. / 20 lbs.	UPS	43
CA-36-4	36"	4,000	2"	45 lbs. / 25 lbs.	UPS	47
CA-40-2	40"	2,000	2"	35 lbs. / 20 lbs.	UPS	48
CA-40-4	40"	4,000	2"	45 lbs. / 25 lbs.	UPS	53
CA-40-6	40"	6,000	2"	55 lbs. / 35 lbs.	UPS	58
CA-48-2	48"	2,000	2"	35 lbs. / 20 lbs.	TRUCK	58
CA-48-4	48"	4,000	2"	45 lbs. / 25 lbs.	TRUCK	61
CA-48-6	48"	6,000	2"	55 lbs. / 35 lbs.	TRUCK	66
CA-60-2	60"	2,000	2"	35 lbs. / 20 lbs.	TRUCK	72
CA-60-4	60"	4,000	2"	45 lbs. / 25 lbs.	TRUCK	76
CA-60-6	60"	6,000	2"	55 lbs. / 35 lbs.	TRUCK	79
CA-72-2	72"	2,000	2"	35 lbs. / 20 lbs.	TRUCK	86
CA-72-4	72"	4,000	2"	45 lbs. / 25 lbs.	TRUCK	90
CA-72-6	72"	6,000	2"	55 lbs. / 35 lbs.	TRUCK	95

CAROUSEL OPTIONS

MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)
CA-BASE-12*	ELEVATED BASE - 40"W x 40"L x 12"H (MAXIMUM CAPACITY 4,000 lbs.)	345
CA-BASE-24*	ELEVATED BASE - 40"W x 40"L x 24"H (MAXIMUM CAPACITY 4,000 lbs.)	460
CA-TP-4848-R*	1/4" THICK TOP PLATE 48" DIAMETER (TREADPLATE SIDE UP)	130
CA-TP-4848-S*	1/4" THICK TOP PLATE 48"W x 48"L (TREADPLATE SIDE UP)	130
CA-S-STEEL	STAINLESS STEEL RINGS (40" DIAMETER ONLY)	54
CA-HBK	MANUAL BRAKE (FIELD INSTALLED)	5
CA-HOD	HAND OPERATED LOCKING DETENT (FACTORY INSTALLED)	10
CA-FTK	FOOT OPERATED LOCKING DETENT (FACTORY INSTALLED)	11

COMPLETE STAINLESS STEEL CONSTRUCTION ALSO AVAILABLE

*CONTACT FACTORY FOR ADDITIONAL SIZES

Heavy-Duty King Pin Carousel

All the ergonomic benefits of the standard carousel with a top plate and stabilizing center pin. Unit will handle a wider variety of loads. Features include 1/4" tread plate top on 4,000 lbs. and 3/8" tread plate top on 6,000 lbs. models. Also includes a heavy-duty maintenance free bearing. The king pin design allows off set loading up to 50% of the capacity on at least 50% of the deck. Standard top plates are square with rounded corners. Contact factory for special sizes.

MODEL NUMBER	SIZE (W x L)	HEIGHT	CAPACITY (POUNDS)	NET WT. (POUNDS)
CA-KP-3636-4	36" x 36"	2-5/8"	4,000	221
CA-KP-3636-6	36" x 36"	2-3/4"	6,000	263
CA-KP-4848-4	48" x 48"	2-5/8"	4,000	367
CA-KP-4848-6	48" x 48"	2-3/4"	6,000	442
CA-KP-6060-4	60" x 60"	2-5/8"	4,000	554
CA-KP-6060-6	60" x 60"	2-3/4"	6,000	654

Thin Spins - pallet truck loadable carousel


- Low-Profile design is ideal for use with Pallet Trucks

When confronted with minimum floor space and only a hand pallet truck, the Thin Spin low-profile carousel is ideal for loading and unloading pallet applications. The Thin Spin is pallet truck loadable because of its sleek 7/8" overall height. The effective ramping length is 4-3/8"; slope is a mere 11°. A safety detent lock restricts carousel rotation when not in use. Units require a starting force of 35 pounds and a maintaining force of 25 pounds.

MODEL NUMBER	USABLE DIAMETER	OVERALL DIAMETER	HEIGHT	CAPACITY (POUNDS)	NET WT. (POUNDS)
LP-4000T	51"	60"	7/8"	4,000	240
LP-4000T-45	45"	54"	7/8"	4,000	220
LP-4000T-39	39"	48"	7/8"	4,000	205




CAROUSEL IS SHOWN WITH RINGS SEPARATED TO ILLUSTRATE BEARINGS

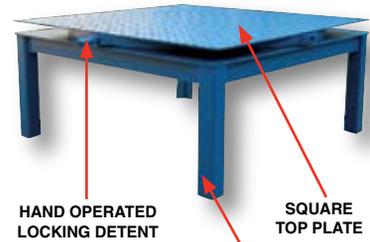


HAND OPERATED LOCKING DETENT SQUARE TOP PLATE



CAROUSEL BASE




HAND OPERATED SPRING LOCKING DETENT LOCKS CAROUSEL EVERY 90° model CA-HOD




HAND OPERATED MANUAL BRAKE LOCKS CAROUSEL IN ANY POSITION model CA-HBK



DVD or VIDEO AVAILABLE



FOOT OPERATED LOCKING DETENT LOCKS CAROUSEL EVERY 90° model CA-FTK

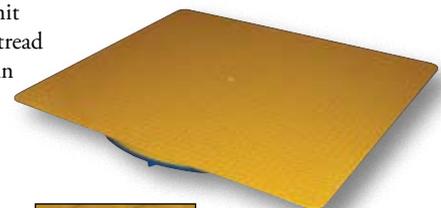

DVD or VIDEO AVAILABLE





A) TT-7/8



B) TT-4



C) TT-PED



D) TT-DPED



E) TT-CPED



F) TT-CDPED



Heavy-Duty Manual Turntables

Maximize workspace and minimize wasteful motion. Benchtop turntables allow workers to stay in one position and rotate items for access from all sides. No need to walk around the table to access areas out of view. Easy and smooth bearing rotation. More than one person can work on projects without getting in each other's way. Use for hundreds of applications; displays, paint spraying, assembly units, repairs, etc. Rugged 1/2" steel plate construction. Easy, smooth rotation won't jostle delicate parts. The double tier units, suffix DPED and CDPED, feature a stationary shelf for storing parts and tools. Series PED and DPED feature a turn knob height adjustment operation while the CPED and CDPED feature a gas cylinder up and down mechanism (like found in office chairs).

TYPE	MODEL NUMBER	DIAMETER	HEIGHT RANGE	CAPACITY (POUNDS)	NET WT. (POUNDS)
A	TT-8-7/8	8"	7/8"	500	4
B	TT-8-4	8"	4"	500	6
A	TT-12-7/8	12"	7/8"	500	11
B	TT-12-4	12"	4"	500	13
A	TT-18-7/8	18"	7/8"	1,000	35
B	TT-18-4	18"	4"	500	40
C	TT-18-PED	18"	21" TO 32"	300	60
D	TT-18-DPED	18"	25" TO 36"	300	95
E	TT-18-CPED	18"	20" TO 30"	300	50
F	TT-18-CDPED	18"	24" TO 34"	300	85
A	TT-24-7/8	24"	7/8"	1,000	75
B	TT-24-4	24"	4"	500	90
C	TT-24-PED	24"	21" TO 32"	300	95
D	TT-24-DPED	24"	25" TO 36"	300	170
E	TT-24-CPED	24"	20" TO 30"	300	105
F	TT-24-CDPED	24"	24" TO 34"	300	165
A	TT-30-7/8	30"	7/8"	1,000	123
B	TT-30-4	30"	4"	500	150
C	TT-30-PED	30"	21" TO 32"	300	160
D	TT-30-DPED	30"	25" TO 36"	300	280

Powered Turntables

Keep tedious material handling at your fingertips. Easy, smooth, clockwise rotation for hundreds of applications. Rotation speed is non-adjustable. These Powered Turntables are wired to 115V, 1 phase. An on/off selector switch incorporated in a 3 foot cord provides power to the unit. A foot control is available. A side skirt to protect items from getting into the rotating mechanism is standard. Rotation is clockwise.

MODEL NUMBER	DIAMETER	HEIGHT	CAPACITY (POUNDS)	R.P.M.	NET WT. (POUNDS)
PT-100	12"	4-1/2"	100	3-1/2	34
PT-250	18"	5-1/2"	250	3	56
PT-750	18"	6-3/8"	750	2	66

FOOT CONTROL, MODEL FC-2,
 OPTIONAL 1 OR 2 R.P.M., model PT-1/2RPM,
 COUNTER-CLOCKWISE ROTATION, model PT-CCW,

Turntables with Powered Height Adjustment

- Allows operator to raise or lower turntable to an ergonomic height
- Each unit has a 360° manual turntable
- AC power, 110V, 1 Phase with hand control for height adjustment
- Height is adjusted with an electric linear-actuator


MODEL NUMBER	DIAMETER	HEIGHT RANGE	CAPACITY (POUNDS)	NET WT. (POUNDS)
TT-18-LA	18"	27" TO 42¾"	750	232
TT-24-LA	24"	27" TO 42¾"	750	267
TT-30-LA	30"	27" TO 42¾"	750	295

Semi-Automatic Stretch Wrap Machines

Increase productivity in the shipping department or at the end of a production line. This unit is complete with a 48" diameter powered turntable and counter-balanced stretch film mast. Easy to operate, simply depress the foot pedal and manually move the mast up and down. Powered by a 115V, 1/2 HP motor with soft start/stop and variable speed control. Variable R.P.M. 3-12. Unit comes with one film rod with special spacers that can be used with any height roll of stretch wrap material between 10" and 20". Ships with mast unbolted. Some assembly required.

The Approach Ramp option allows the operator to load and unload the machine with a pallet truck (model SWA-48 only).

The Powered Mast option is available with a 24V hand control to work with those taller loads. The hand held control is used to raise/lower the film while the foot control is used to operate the turntable.

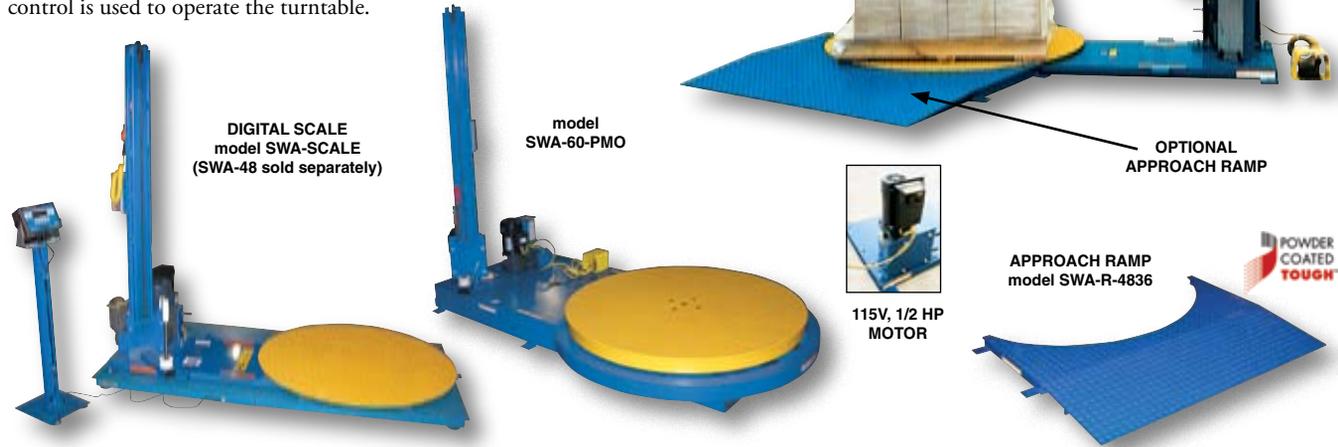

MODEL NUMBER	TURNTABLE DIAMETER	TURNTABLE HEIGHT	CAPACITY (POUNDS)	MAXIMUM LOAD DIAMETER	MAXIMUM LOAD HEIGHT	NET WT. (POUNDS)
SWA-48	48"	2-3/8"	4,000	76"	78"	665
SWA-54	54"	11"	5,000	86"	75"	1543
SWA-60	60"	11"	5,000	86"	75"	1659
SEMI-AUTOMATIC STRETCH WRAP MACHINE ACCESSORIES						
SWA-PMO	115V POWERED MAST OPTION (FACTORY INSTALLED)					30
SWA-PMO-RF	115V POWERED MAST OPTION (RETROFIT - FIELD INSTALLED)					120
SWA-SCALE*	SCALE (AVAILABLE ONLY ON SWA-48 & ADDS 3" TO HEIGHT - FACTORY INSTALLED)					680
SWA-VCC	NON-STANDARD VOLTAGE OR PHASE SUPPLY (115V 1 PHASE STANDARD)					---
SWA-R-4836*	48"W x 36"L x 2-3/8"H APPROACH RAMP (FOR ELECTRIC PALLET TRUCKS)*					223
SWA-R-4848*	48"W x 48"L x 2-3/8"H APPROACH RAMP (FOR MANUAL PALLET TRUCKS)*					253
SWA-R-4860-SCL	48"W x 60"L x 6"H APPROACH RAMP (FOR SWA-48 WITH SCALE) (ELECTRIC & MANUAL PALLET TRUCKS)					346
SWA-FILM	20"W x 80 ga. x 6,000' x 3" CORE (ONE ROLL)					42

*FOR USE WITH MODEL SWA-48 ONLY

Medium Duty High Performance Semi-Automatic Stretch Wrap Machine

User friendly touch-screen control center provides workers efficient control of the wrapping process. The state of the art digital control circuit allows the operator to set the number of pallet rotations and film wrapping patterns. The operator simply ties off the film wrap on the carousel and presses the start button. When the SWA-60-AW has completed the wrapping process, the operator cuts the film wrap, and removes the wrapped pallet. The 60" round carousel has variable speed, 0-13 rpm, with soft start and stop feature. Photocell sensors automatically adjust to different pallet heights. Maximum package height is 78". 20" high film wrap can be set to a 240% or 340% pre-stretch with 4 standard multifunction wrapping patterns. Film not included. Ships knockdown. Some assembly required. 110V 1phase power.

MODEL NUMBER	TURNTABLE DIAMETER	TURNTABLE HEIGHT	CAPACITY (POUNDS)	NET WT. (LBS.)
SWA-60-AW	60"	3-1/8"	4,000	1170
SWA-60-AW-SCL	SCALE (FACTORY INSTALLED / ADDS 3" TO HEIGHT)		500	
SWA-R-6060-AW	40"W x 60"L x 3"H APPROACH RAMP		300	



Hand Held Stretch Wrappers

These hand held, lightweight, freewheeling dispensers maintain precision tension control assuring a tight, smooth application. Ergonomic design reduces both bending and fatigue. Now even the bottom row can be wrapped as tightly as the top with help from its ergonomic foam bent handle. Accommodates rolls up to 8" in diameter.

The compact Stretch Wrap Knife is small enough to fit in your pocket. Specially angled cutting head easily slices through stretch wrap material without sticking or binding. Safety design will not cut user or products. Made of high-density plastic. Replacement blades available.



SW-HAND-R

SW-HAND-BG



SW-KNIFE

MODEL NUMBER	DESCRIPTION	ROLL HEIGHTS	CORE SIZE	NET WT. (POUNDS)
SW-HAND-R	ROUND STYLE	12" TO 20"	2" & 3"	6
SW-HAND-BG	ERGO STYLE	12" TO 20"	1/2", 2" & 3"	6

MODEL NUMBER	DESCRIPTION	NET WT. (POUNDS)
SW-KNIFE	STRETCH WRAP FILM KNIFE	1
SW-RB	REPLACEMENT BLADES (BOX OF 100 BLADES)	6
SRF-18	FILM FOR HAND HELD WRAPPER 18" WIDE x 1,500 FEET (80 gauge) 4 ROLLS PER CASE	46



model POW-CAR



APPROACH RAMP
model SWA-R-4836

Low-Profile Powered Carousel

The Low-Profile Powered Carousel features a heavy-duty steel non-skid treadplate platform 48" in diameter. This unit handles loads up to 4,000 pounds. Standing only 2-3/8" tall, this system is easily accessible with a fork truck; optional approach ramp is required for pallet truck use. Foot control operation with a variable speed control, cushion start/stop, and rugged 3/4 HP motor with belt drive standard. Wall plug standard 115V/single phase/20 amp. Optional approach ramp measures 48" wide by 36" long. Manual Air Bearing Carousel is also available, contact factory.

MODEL NUMBER	DESCRIPTION	CAPACITY (POUNDS)	R.P.M.	NET WT. (POUNDS)
POW-CAR	115V AC POWER	4,000	3-12	569
SWA-R-4836	APPROACH RAMP	4,000	--	223
SWA-R-4848	APPROACH RAMP	4,000	--	253

BI-DIRECTIONAL OPTION, MODEL SWA-REV, \$???



model STPC-CD

Stand Alone Powered Carousel

Easily rotate pallets, skids, and other large objects with these rugged powered carousels. Each unit includes a 48" diameter round treadplate turntable. Turntable is supported with inverted casters for use as bearings. Units are complete with turntable, base, 115V single-phase power unit, and variable-speed control (electric/hydraulic unit has fixed speed control). Turntable is operated with a foot control. Heavy-duty steel construction with painted finish.

MODEL NUMBER	DESCRIPTION	R.P.M.	HEIGHT	CAPACITY (POUNDS)	NET WT. (LBS.)
STPC-CD	CHAIN DRIVEN	3-12	24"	4,000	788
STPC-EHD	ELECTRIC HYDRAULIC DRIVEN	8	13 1/2"	4,000	788

BI-DIRECTIONAL OPTION, MODEL STPC-REV, \$???



Pallet Cart & Carousel

This unique cart serves as two products in one. First, use cart to transport products to where they are needed. Then, once at desired location, a simple flip of a switch on the casters will allow the cart to manually rotate 360° like a carousel for easy unloading and improved efficiency.

The cart features a 48" diameter round platform with a 1/4" thick treadplate deck. The handle is removable to allow for full deck access from any position. Includes four swivel 8" x 2" phenolic casters with swivel locks. Steel construction.

MODEL NUMBER	DIAMETER	PLATFORM HEIGHT	CAPACITY (POUNDS)	CASTER TYPE	NET WT. (LBS.)
CC-48	48"	10"	2,000	8" PHENOLIC	336

Semi-Automatic Strapping Machine

- Minimize Packaging Time
- Secure Contents Effectively
- User Friendly Controls
- Stainless Steel Strapping Surface
- Portable for Convenience
- Easy Access for Reloading Strapping



DVD or VIDEO
AVAILABLE



This fully portable strapping machine dispenses, tightens, and seals economical polypropylene strapping around packages or bundles greater than 3". Unit automatically tensions strap and joins the ends with a secure heat weld. The motor automatically switches off when not in use. As the strap is inserted, the motor automatically restarts. Wall plug is standard 115V single phase 15 amp.


MODEL NUMBER	OVERALL DIMENSIONS	STRAPPING WIDTH	POWER SUPPLY	CASTER SIZE	NET WT. (POUNDS)
S-2001	22½"W x 35"L x 29"H	½"	115V	3" x 1¼"	300

Edge Guards

Rubber for Cargo Straps - These 1/4" thick strap guards stay in place even if cargo shifts. Permanently on strap so it won't get lost.

Steel for Chain and Cargo Straps - Great for sharp and rugged edges. Also used on crates to increase sturdiness.

Plastic for Carton Straps and Cargo Straps - These carton straps prevent plastic strapping from "cutting" into cardboard cartons. The cargo strap guard is an economical way to protect cargo and strap damage.

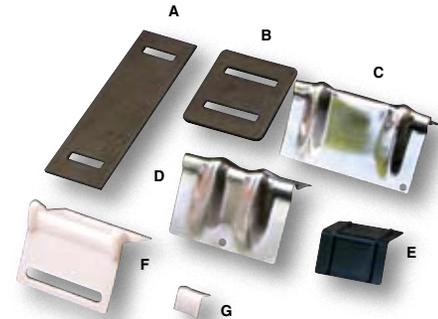

TYPE	MODEL NUMBER	CONSTRUCTION	SIZE (W x L)	PIECES PER PACKAGE	NET WEIGHT (PER PKG LBS.)
A	EDGE-R12	RUBBER	5¾" x 12"	50	46
B	EDGE-R6	RUBBER	5" x 6"	100	31
C	EDGE-S7	STEEL	7½" x 4"	10	15
D	EDGE-S6	STEEL	6" x 4"	10	12
E	EDGE-P2	PLASTIC	2½" x 1¾"	1,000	30
F	EDGE-P5	PLASTIC	5½" x 4"	100	2
F	EDGE-N1	NYLON	5½" x 4"	100	2
G	EDGE-P1	PLASTIC	1-3/8" x 1¼"	1,000	10

Propane Powered Shrink Wrap Heat Gun

Lightweight and easy to use. Features adjustable regulator so power is controllable to suit all types of film. The 26 ft. hose comes with a swivel connector so it does not become twisted. A two position stainless steel nozzle rotates from vertical to horizontal and remains cool so there is no risk of burns. Comes in its own storage case. Propane container not included. Shrink wrap film not included.

MODEL NUMBER	DESCRIPTION	TEMPERATURE SETTING	NET WT. (POUNDS)
SH-GUN-P	PROPANE HEAT GUN	125,000 BTU/HOUR	12



Electric Shrink Wrap Heat Gun

This lightweight easy to use Shrink Wrap Heat Gun is great for packaging small items. Ideal for use in shipping areas, parts departments, and printing plants. 115V, single phase standard with a 5 foot cord and plug. Shrink wrap film not included.

MODEL NUMBER	DESCRIPTION	TEMPERATURE SETTING	VOLTAGE	NET WT. (POUNDS)
SH-GUN-E	ELECTRIC HEAT GUN	700° & 900°	115V	4



Impulse Bag Sealer

This lightweight table top Impulse Bag Sealer is ideal for packaging bulk mail, literature, catalogs or small parts. Easy to operate. A heat weld closes each bag tight. 115V, single phase with cord and plug. Poly bags are not included.

MODEL NUMBER	SEALING WIDTH	VOLTAGE	WATTS	NET WT. (POUNDS)
ISEAL-TT	12"	115	510	10





Strapping Cart

This universal strapping cart is designed for use with both Poly and Steel strapping. Now you only need one cart for both types of strapping. Unique multi-tier discs allow for use with strapping core sizes of 16" x 3", 16" x 6" and 8" x 8". Cart includes storage tray for holding clips, seals and tools. Heavy-duty wheels for portability. Steel construction with powder coat finish.

MODEL NUMBER	STRAPPING IT ACCEPTS	OVERALL SIZE (W x D x H)	NET WT. (POUNDS)
STRAP-PS-HD	STEEL & POLY	25" x 20¼" x 40¼"	70



Vertical/Horizontal Strapping Cart

This unique cart allows the operator to apply strapping both vertically and horizontally around the load. For use with both steel and poly strapping. For use with 16" diameter core x 3" strapping material. To use, simply engage outer detents (disengaging inner) and turn the removable handle until strap is in the horizontal position. Once in the horizontal position, disengage the outer detents and engage the inner detents. The strap can now be raised and lowered from 28" down to 8" with the same turn handle. Each unit comes standard with 10" x 2½" semi-pneumatic wheels. The equipment tray measures 13½"W x 4½"L x 5"D. Strapping is not included.

MODEL NUMBER	OVERALL SIZE (W x D x H)	FEED STRAP HEIGHT	STANDARD MATERIAL	STRAPPING IT ACCEPTS	NET WT. (POUNDS)
STRAP-VH	27" x 27" x 42"	8" TO 28"	24" MAX. DIA.	STEEL & POLY	140



Manual Pallet Probe Strapping Cart

- Increase Productivity • Economical, Fast, Easy • Low Maintenance

The Manual Pallet Probe is a quick and simple answer to a long time dilemma - getting poly strapping through your pallet. To use, simply transport cart to your loaded pallet, extend arm, and run strapping to end clip. After strapping is secure, roll cart probe into pallet along center stringer. The strapping arm will then protrude out the other end allowing the operator to pull the strapping up and over pallet. Unit accepts polypropylene strapping. Tray size is 19"W x 5¾"D. The maximum core width is 5", while the minimum core width is 2½". Overall material diameter is 16" with a minimum of 13¾". Strapping is not included.

MODEL NUMBER	ARM LENGTH	STANDARD MATERIAL	STRAPPING IT ACCEPTS	NET WT. (POUNDS)
STRAP-P2	40"	24" MAX. DIAMETER	POLYPROPYLENE	110



Semi-Automatic Pallet Probe Strapping Machine

- User Friendly
- Tension up to 175 lbs.
- 40" Foldable Pallet Probe
- Uses 3/8", 1/2" and 5/8" Poly Strapping

Eliminate hand strapping and speed up the process of pallet strapping with this Semi-Automatic Pallet Strapper. Unit automatically feeds the desired polypropylene strap through the pallet, tightens, and seals the strap around the pallet. 115V power supply.

Operation: (a) Unfold pallet probe, (b) Push pallet probe into pallet, (c) Feed polypropylene strap, (d) Insert tip of strap into strapway, (e) Adjust tension, pulling automatically into heat seal, (f) Strip is then cut off to feed the strap out, (g) One-cycle automatically complete, (h) Remove machine and insert into next pallet. Strapping is not included.



DVD or VIDEO AVAILABLE

MODEL NUMBER	OVERALL SIZE (W x D x H)	FEED STRAP HEIGHT	TENSION (POUNDS)	NET WT. (POUNDS)
DBA-130	22"W x 71"D x 59"H	53½"	175	350

Poly and Steel Strapping Tools

Here are all the tools and supplies you need to cut and seal strapping. Cutter cuts up to 5/8" wide strapping. Tensioner features ratchet action that applies maximum tension instantly, pulling and cutting 3/4" strapping with little effort.



model PKG-ST



model PKG-SS-SM



model PKG-SS-LG



model PKG-C-1



model PKG-C-125



model PKG-C-2



model PKG-PTC



model PKG-PS

MODEL NUMBER	DESCRIPTION	STRAPPING IT ACCOMMODATES	STRAPPING WIDTH	NET WT. (LBS.)
PKG-ST	TENSIONER	STEEL	3/8" to 3/4"	5
PKG-SS-SM	SEALER	STEEL	3/8" & 1/2"	5
PKG-SS-LG	SEALER	STEEL	5/8" & 3/4"	5
PKG-C-1	CUTTER	STEEL	3/8" to 1"	2
PKG-C-125	CUTTER	STEEL	3/8" to 1-1/4"	2
PKG-C-2	CUTTER	STEEL	3/8" to 2"	3
PKG-PTC	TENSIONER & CUTTER	POLY	3/8" to 3/4"	3
PKG-PS	SEALER	POLY	5/8"	3
PKG-PS-12	SEALER	POLY	1/2"	3



Heavy-Duty Poly Strapping & Seals

Polypropylene strapping is the most commonly used strapping material. It's lightweight and easy to handle. Polypropylene strapping is an excellent choice for light duty palletizing, carton closing, and bundling. Tensile strength is 300 pounds. It can be used with the following strapping machines; STRAP-VH, STRAP-P2, STRAP-PS-HD.

MODEL NUMBER	DESCRIPTION	QUANTITY	NET WT. (POUNDS)
ST-12-8X8-BL	1/2" STRAPPING (8" x 8" CORE)	9,000 FEET	8
ST-12-16X3-BL	1/2" STRAPPING (16" x 3" CORE)	4,500 FEET	12
ST-12-16X6-BL	1/2" STRAPPING (16" x 6" CORE)	9,000 FEET	23
PSEAL-12	1/2" SEALS FOR POLY STRAPPING	1000 PCS.	12



WORKS WITH STRAP-VH, STRAP-P2 & STRAP-PS-HD

High Strength Steel Strapping

Provides strong reinforcement for those demanding jobs. Ideal for general packaging, bundling, and palletizing. Black in color. Works with model STRAP-VH and STRAP-P2.

MODEL NUMBER	DESCRIPTION	QUANTITY	NET WT. (POUNDS)
SS-12-HS	1/2" STRAPPING	2,540 FEET	107
SS-58-HS	5/8" STRAPPING	2,340 FEET	107
SS-34-HS	3/4" STRAPPING	1,940 FEET	107
SSEAL-12	1/2" SEALS FOR STEEL STRAPPING	1000 PCS.	14
SSEAL-58	5/8" SEALS FOR STEEL STRAPPING	1000 PCS.	22
SSEAL-34	3/4" SEALS FOR STEEL STRAPPING	1000 PCS.	25



WORKS WITH STRAP-VH & STRAP-P2

Polypropylene Strapping

The Polypropylene Strapping has a smooth uniform texture that resists splitting. The core size is 9" x 8". Absorbs shock loading. Works only with model DBA-130 and model S-2001.

MODEL NUMBER	COLOR	STRAPPING WIDTH	FEET PER ROLL	CORE SIZE	TENSILE STRENGTH	NET WT. (LBS.)
ST-38-9X8-YL	YELLOW	3/8"	12,900	9" x 8"	242 lbs.	39
ST-38-9X8-WH	WHITE	3/8"	12,900	9" x 8"	242 lbs.	39
ST-38-9X8-NA	CLEAR	3/8"	12,900	9" x 8"	242 lbs.	39
ST-12-9X8-YL	YELLOW	1/2"	9,900	9" x 8"	308 lbs.	36
ST-12-9X8-WH	WHITE	1/2"	9,900	9" x 8"	308 lbs.	36
ST-12-9X8-NA	CLEAR	1/2"	9,900	9" x 8"	308 lbs.	36



WORKS WITH DBA-130 & S-2001



Multi-Task Packaging Cart

Minimize packaging time and costs by having wrapping and strapping components organized and readily available. Designed to be the only cart you need for all your product wrapping and strapping requirements. Cart has dispensing ability for one steel and one poly strapping roll. Each strapping compartment includes a tensioner for controlled strap dispensing. Compartment doors also serve as ramps to easily roll strapping up into cart. Steel strapping compartment is 3¼" wide. Poly strapping compartment is 6¼" wide. Detachable pallet wand is included for use with poly strapping (max. 5/8" wide). Simply attach strapping to the end of the wand, and then use wand to fish strapping through pallet to other side. Wand folds so it can be stored vertically in cart. The top of cart includes tray for storage of tensioners, cutters, seals, and other types of miscellaneous tools. Cart is portable with (2) rigid and (2) swivel 4" x 1¼" poly-on-poly wheels and push handle. Steel construction with powder coat finish.

MODEL NUMBER	MAXIMUM ROLL DIAMETER	MAXIMUM ROLL WIDTH (MT'L WIDTH)	MAXIMUM STRAPPING DIAMETER	NET WT. (POUNDS)
PKG-CART	11"	26"	22"	250

ADDITIONAL PALLET WAND, MODEL PKG-WAND, \$38.00 LIST



model CTC-1856-B

Portable Carton Carts

Portable steel cart is designed to store, organize, and transport your empty cardboard boxes. Chrome plated uprights and frame dividers with powder coated black shelves. Ships knockdown. Model CTC-1856-B features two adjustable-height shelves with adjustable box dividers ideal for small boxes. Four swivel casters for easy maneuverability are standard. Model CTPT-1844 has adjustable box dividers ideal for oversized boxes. Optional casters available.

MODEL NUMBER	OVERALL SIZE (D x L x H)	NUMBER OF DIVIDERS	DISTANCE BETWEEN DIVIDERS	CAPACITY (POUNDS)	NET WT. (LBS.)
CTC-1856-B	18" x 56" x 50"	8	4"	400	100
CTPT-1844	18" x 44" x 30"	5	17"W x 22"H	400	55
CTPT-CK	Optional Caster Kit for CTPT-1844 5" x 1¼" Poly-On-Poly				8

model CTPT-1844 with CTPT-CK



model SCALE-S

Electronic Digital Floor Scale

Low-profile scale is only 3-1/2" off the floor, allowing easy loading and unloading of heavy equipment weighing up to 5,000 pounds. Rugged design has a smooth top surface. The LCD digital display stands 42" high. Meets US standard 99-054 and Canadian standard AM-5318. Optional Approach Ramp for pallet truck accessibility - order two for drive-on, drive-off convenience.

MODEL NUMBER	DESCRIPTION	OVERALL WIDTH	OVERALL LENGTH	OVERALL HEIGHT	NET WT. (POUNDS)
SCALE-S	SCALE	48"	48"	3½"	355
SCALE-R	APPROACH RAMP	48"	48"	3½"	120

series V-PL



Parts Scales - Mettler Toledo™

Highly accurate, user friendly scales. These scales capture a stable weight reading in less than one second. Features a rugged aluminum housing, stainless steel weighing pan, and a simple keyboard. Switches between pounds and kilograms. Operates on 120V AC.

MODEL NUMBER	PLATFORM SIZE	CAPACITY (POUNDS)	RESOLUTION (POUNDS)	NET WT. (POUNDS)
V-PL-3	7.9" x 9.5"	7.5	0.0005	13
V-PL-6	7.9" x 9.5"	12	0.001	13
V-SL-60	9.5" x 13.8"	120	0.01	21

series V-SL



DVD or VIDEO AVAILABLE



SCALE HEAD

Pallet Trucks with Digital Scale

The Pallet Truck with Digital Scale allows you to weigh your load on the spot for maximum efficiency. The frame uses heavy-duty steel construction for maximum strength and durability. This model is very user friendly and is suitable for low height lifting. The built in scale allows you to weigh your load as you are handling it. The scale is selectable in a variety of increments to adjust to the size of your load. It has keyboard calibration and functional setup with automatic zero capabilities. Digital filtering is used to help compensate for vibration and motion to make the Pallet Truck with Digital Scale smooth and accurate. Forks are 7" wide each. Factory calibrated for shipping destination.



MODEL NUMBER	CAPACITY (POUNDS)	OVERALL FORK DIMENSIONS	FORK SERVICE RANGE	NET WT. (POUNDS)
PM-2048-SCL-LP	5,000	22-3/8"W x 47-1/2"L	3" to 7½"	338
PM-2748-SCL-LP	5,000	27-1/2"W x 47-1/2"L	3" to 7½"	371
PM-2748-SCL-LP-PT*	5,000	27-1/2"W x 47-1/2"L	3" to 7½"	378

* PALLET TRUCK WITH SCALE AND PRINTER